




## Orthomat® Dot


Simple but effective workplace mat

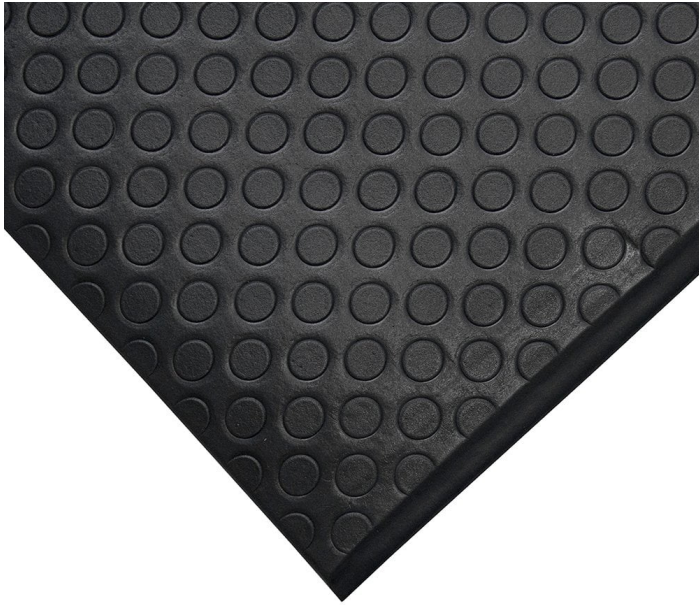


- Single layer foam anti-fatigue mat.
- Dot pattern surface for more grip, reduces slip risk.
- Insulates standing workers against the effects of cold concrete floors.
- Lightweight, so easy to transport and reposition.
- Best suited to dry environments.
- High visibility version available with bright yellow borders.
- Available in mats and rolls.
- Ideal for lighter industrial use where the user doesn't turn regularly in a static position.
- Fire tested to BS EN 13501-1.



## Styles Available



Standard



Safety

# Parts

| Part Number | Size                     | Colour       | Weight (kg) |
|-------------|--------------------------|--------------|-------------|
| AD010705C   | 1.2 m x per linear metre | Black/Yellow | 3.6         |
| AD010705    | 1.2 m x 18.3 m           | Black/Yellow | 66          |
| AD010703C   | 0.9 m x per linear metre | Black/Yellow | 2.7         |
| AD010703    | 0.9 m x 18.3 m           | Black/Yellow | 50          |
| AD010702    | 0.9 m x 1.5 m            | Black/Yellow | 3.27        |
| AD010005C   | 1.2 m x per linear metre | Black        | 3.03        |
| AD010005    | 1.2 m x 18.3 m           | Black        | 50          |
| AD010003C   | 0.9 m x per linear metre | Black        | 2.7         |
| AD010003    | 0.9 m x 18.3 m           | Black        | 50          |
| AD010002    | 0.9 m x 1.5 m            | Black        | 3.27        |
| AD010001    | 0.6 m x 0.9 m            | Black        | 1.31        |

# Technical Specifications

|                                                         |                                                                 |
|---------------------------------------------------------|-----------------------------------------------------------------|
| Material                                                | Open Cell PVC (Foam)                                            |
| Surface Finish                                          | Dot pattern                                                     |
| Product Height                                          | 9.5 mm                                                          |
| Size of Safety Border                                   | 100 mm                                                          |
| Min. Operating Temperature                              | 0°C                                                             |
| Max. Operating Temperature                              | +60°C                                                           |
| Environmental Resistance                                | Suitable for dry indoor environments only                       |
| Typical Applications                                    | Production lines, Assembly areas, Packing stations, Workbenches |
| Installation Method                                     | Loose lay                                                       |
| Cleaning Method                                         | Brush/mop the top surface                                       |
| Guarantee                                               | 1 year when used in a dry environment                           |
| Adhesive recommended by F.Ball for permanent bond       | F44                                                             |
| Tackifier recommended by F.Ball                         | F41                                                             |
| Adhesive recommended by F.Ball for heavy-duty/wet areas | F74, F81, F84                                                   |

# Additional Information



Orthomat Fire Test EN ISO 11925



Orthomat Fire Test EN ISO 9239



Orthomat Fire Test BS EN 13501

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email [sales@coba.com](mailto:sales@coba.com)

[www.coba.com](http://www.coba.com)