









COBAmat® Inter

Standing the test of time, our original safety matting

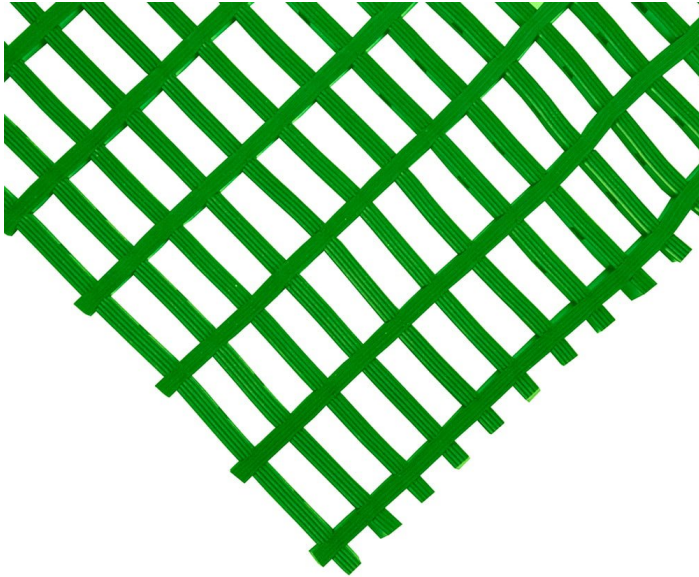

- The original premium multi-purpose safety mat widely used across the industry today.
- An ideal choice for longer production lines, or for covering mezzanine floors.
- Available in four vibrant colours and four weave (hole) sizes to suit the application.
- Vinyl strips are interwoven, rather than welded, for better flexibility and lower risk of breaking.
- Cross-ribbed grip to reduce slipping.
- Fully reversible for added longevity.
- Suitable for use in wet and dry environments, or where swarf and debris cause problems.
- Fire tested to BS EN 13501-1 and slip tested to DIN 51130.
- Widely used in a range of industrial and non-industrial environments, both wet and dry.
- 30 mm x 10 mm hole size.



Parts

Part Number	Size	Colour	Weight (kg)
CE020610	0.6 m x 10 m	Blue	35
CE010610	0.6 m x 10 m	Black	35
CE040605	0.6 m x 5 m	Green	17
CE030605	0.6 m x 5 m	Red	17
CE020605	0.6 m x 5 m	Blue	17
CE010605	0.6 m x 5 m	Black	17
CE041210	1.2 m x 10 m	Green	73
CE031210	1.2 m x 10 m	Red	73
CE021210	1.2 m x 10 m	Blue	73
CE011210	1.2 m x 10 m	Black	73

Technical Specifications

Material	PVC
Surface Finish	Cross ribbed lattice
Product Height	12 mm
Hole Size	30 mm x 10 mm
Min. Operating Temperature	-20°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	PVC is resistant to many different chemicals, alkalis and general industrial chemicals. PVC resists alcohols, aliphatic hydrocarbons, oils, weak acids, strong mineral acids and alkalis. PVC resists oil and

Part Number	Size	Colour	Weight (kg)
CE041205	1.2 m x 5 m	Green	36
CE031205	1.2 m x 5 m	Red	36
CE021205	1.2 m x 5 m	Blue	36
CE011205	1.2 m x 5 m	Black	36
CE040910	0.9 m x 10 m	Green	54
CE030910	0.9 m x 10 m	Red	54
CE020910	0.9 m x 10 m	Blue	54
CE010910	0.9 m x 10 m	Black	54
CE040905	0.9 m x 5 m	Green	26.9
CE030905	0.9 m x 5 m	Red	26.9
CE020905	0.9 m x 5 m	Blue	26.9
CE010905	0.9 m x 5 m	Black	26.9
CE040610	0.6 m x 10 m	Green	35
CE030610	0.6 m x 10 m	Red	35

grease if properly cleaned. PVC does not resist organic solvents, ketones, esters and aromatic hydrocarbons. Please contact us for more specific details

Environmental Resistance	Suitable for wet and dry environments, indoors or outdoors
UV Resistance	Resistant to UV, but please note that red is not colourfast in direct sunlight
Typical Applications	General industrial, Engineering, Machine tool areas
Installation Method	Loose lay, reversible
Cleaning Method	Pressure hose with mild detergent if required
Slip Tested to	DIN 51130 - R10

Additional Information



Workstation Ramp Slip Test DIN 51130



Workstation Fire Test EN ISO 11925



Workstation Fire Test EN ISO 9239



Workstation Fire Test BS EN 13501

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@coba.com

www.coba.com