




## Comfort-Lok

Fatigue relief for standing workers on production lines or benches



- Heavy-duty rubber mats provide a comfortable standing surface for operatives.
- Available as interlocking modules for long runs, or as a single workstation mat.
- Resistant to oil and grease making it ideal for food production areas or in any catering business.
- Diamond patterned surface provides underfoot grip.
- Hardwearing rubber ensures a long life in normal use.
- Suitable for high temperature environments.
- Slip tested to DIN 51130.

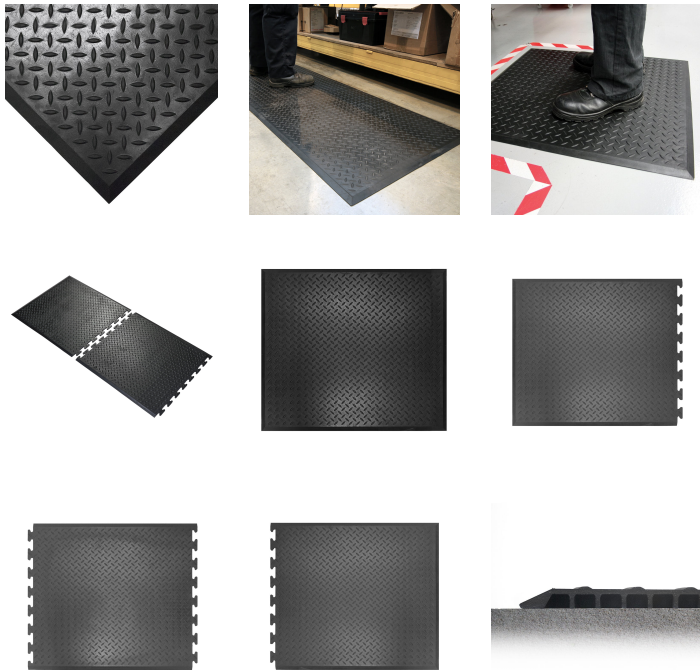

## Parts

| Part Number | Size          | Colour | Weight (kg) |
|-------------|---------------|--------|-------------|
| CL010001    | 0.7 m x 0.8 m | Black  | 4.1         |
| CL010002    | 0.7 m x 0.8 m | Black  | 4.1         |
| CL010004    | 0.7 m x 0.8 m | Black  | 4.1         |

## Technical Specifications

|                             |                              |
|-----------------------------|------------------------------|
| Material                    | Natural rubber/25% NBR blend |
| Recycled Material Content % | 22.3%                        |
| Surface Finish              | Diamond pattern              |
| Product Height              | 12 mm                        |
| Product Weight              | 4.2 kg                       |
| Min. Operating Temperature  | -20°C                        |

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| <b>Max. Operating Temperature</b> | +50°C                                        |
| <b>Resistance to Chemicals</b>    | Limited resistance to fat and mineral oil    |
| <b>Environmental Resistance</b>   | Suitable for wet and dry indoor environments |
| <b>UV Resistance</b>              | Yes                                          |
| <b>Typical Applications</b>       | General industrial                           |
| <b>Installation Method</b>        | Loose lay interlocking mats                  |
| <b>Cleaning Method</b>            | Pressure hose                                |
| <b>Tensile Strength</b>           | 3 MPa                                        |
| <b>Elongation</b>                 | 250%                                         |
| <b>Application Temperature</b>    | -30°C to 50°C                                |
| <b>Slip Tested to</b>             | DIN 51130 - R10                              |
| <b>Manufacturing process</b>      | Compression moulding                         |

## Additional Information



Comfort-Lok DIN 51130 Ramp Slip Test

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email [sales@coba.com](mailto:sales@coba.com)

[www.coba.com](http://www.coba.com)