





COBAmat® Heavy

Standing the test of time, our original safety matting

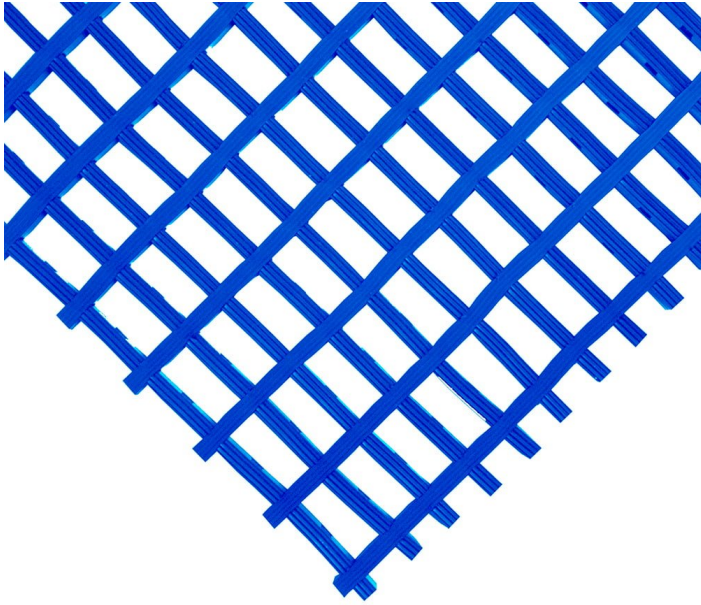

- The original premium multi-purpose safety mat widely used across the industry today.
- An ideal choice for longer production lines, or for covering mezzanine floors.
- Available in four vibrant colours and four weave (hole) sizes to suit the application.
- Vinyl strips are interwoven, rather than welded, for better flexibility and lower risk of breaking.
- Cross-ribbed grip to reduce slipping.
- Fully reversible for added longevity.
- Suitable for use in wet and dry environments, or where swarf and debris cause problems.
- Fire tested to BS EN 13501-1 and slip tested to DIN 51130.
- The toughest of all the COBAmat® options for enhanced durability.
- Extra strength is derived from the smaller hole size which makes it more rigid.
- Fixing blocks are available to secure the matting in place.
- 22 mm x 10 mm hole size.



Parts

Part Number	Size	Colour	Weight (kg)
CD010910C	0.9 m x per linear metre	Black	5.2
CD020910C	0.9 m x per linear metre	Blue	5.2
CD011210C	1.2 m x per linear metre	Black	7.2
CD020610C	0.6 m x per linear metre	Blue	3.5
CD040905	0.9 m x 5 m	Green	26
CD030905	0.9 m x 5 m	Red	26
CD020905	0.9 m x 5 m	Blue	26
CD010905	0.9 m x 5 m	Black	26
CD040610	0.6 m x 10 m	Green	35
CD030610	0.6 m x 10 m	Red	35

Technical Specifications

Material	PVC
Surface Finish	Cross ribbed lattice
Product Height	12 mm
Hole Size	22 mm x 10 mm
Min. Operating Temperature	-20°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	PVC is resistant to many different chemicals, alkalis and general industrial chemicals. PVC resists alcohols, aliphatic hydrocarbons, oils, weak acids, strong mineral acids and alkalis. PVC resists oil and

Part Number	Size	Colour	Weight (kg)
CD020610	0.6 m x 10 m	Blue	35
CD010610	0.6 m x 10 m	Black	35
CD040605	0.6 m x 5 m	Green	17
CD030605	0.6 m x 5 m	Red	17
CD020605	0.6 m x 5 m	Blue	17
CD010605	0.6 m x 5 m	Black	17
CD041210	1.2 m x 10 m	Green	72
CD031210	1.2 m x 10 m	Red	72
CD021210	1.2 m x 10 m	Blue	72
CD011210	1.2 m x 10 m	Black	72
CD041205	1.2 m x 5 m	Green	36
CD031205	1.2 m x 5 m	Red	36
CD021205	1.2 m x 5 m	Blue	36
CD011205	1.2 m x 5 m	Black	36
CD040910	0.9 m x 10 m	Green	52
CD030910	0.9 m x 10 m	Red	52
CD020910	0.9 m x 10 m	Blue	52
CD010910	0.9 m x 10 m	Black	52

grease if properly cleaned. PVC does not resist organic solvents, ketones, esters and aromatic hydrocarbons. Please contact us for more specific details

Environmental Resistance	Suitable for wet and dry environments, indoors or outdoors
UV Resistance	Resistant to UV, but please note that red is not colourfast in direct sunlight
Typical Applications	General industrial, Engineering, Machine tool areas
Installation Method	Loose lay, reversible
Cleaning Method	Pressure hose with mild detergent if required
Slip Tested to	DIN 51130 - R10

Additional Information



Workstation Fire Test BS EN 13501



Workstation Fire Test EN ISO 9239



Workstation Fire Test EN ISO 11925



Workstation Ramp Slip Test DIN 51130

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@coba.com

www.coba.com